

## CONDUCTED REFERENCE SOURCE CRS-1530


- Providing reference source
- Avoiding measurement errors
- Comparing measurement site condition (EMC Lab)

### FEATURES

- Provides reference source to measuring instruments checking setup defaults conditions of LISN, cables, etc.
- Reduces measurement uncertainty
- Usable without changing of setup condition during EMI measurement
- Application
  - Authorized EMC Lab
  - Private EMC Lab
  - Research Lab/Institutes
  - University
  - Industries
  - Others




### REFERENCE SIGNAL

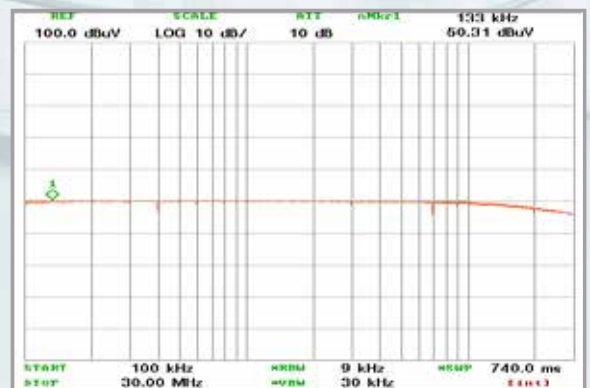

### TECHNICAL SPECIFICATION

Frequency Range	150kHz~30MHz
Power	DC 12V Battery
Output Level	50dBuV ±3dBuV
Frequency stability	Quartz drive
Low Voltage Detection	Buzzer
Power Indicator	LED
Operating Temp range	15°C ~ 55°C
Dimension	W65 D65 H120 (mm)
Weight	300 g

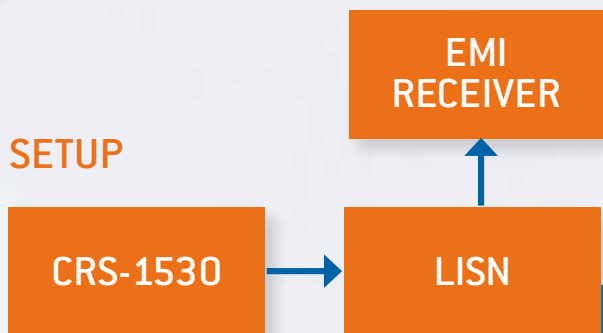

**Easy EMC**

苏州安辐捷电子科技有限公司

地址：江苏省昆山市玉山镇新南中路567号1号楼A座  
1918-1919室 邮编：215300  
电话：+86 512 50125796; +86 18994427687  
邮件：sales@afj-china.cn