

CG01Series

Comb Generator

• Frequency Range: 30MHz-1GHz

• Frequency step:5/10MHz,5MHz,10MHz,25MHz





Comb Generator series

Features

• Frequency Range: 30MHz-1GHz

Frequency step: 5/10MHz,5MHz,10MHz,25MHZ



Description

The CG01 series Comb Generator is a radiated reference signal source. As a conducted signal source, the output is available directly from the connector. An antennas is supplied with the Comb Generator for generating radiated reference signals. It is a self-contained source of signals consisting of frequency harmonics at 5/10 MHz /25 MHZ intervals, and is usable from 30MHz up to at least 1GHz.

The Comb Generator is powered by a rechargeable internal battery and external power cable connection. When fully charged, the battery allows continuous operation of up to 16 hours. The Comb Generator is included with a battery charger, USB cable , antennas and accessories are shipped in a wooden storage box.



Application

The main application of Comb Generator is to quickly verify conducted emissions test setups. And the most important application is trouble shooting Open Area Test Sites(OATS).An OATS must be completely calibrated before it is put into service.

The Comb Generator the test engineer will be able to perform quick a verification of the conducted test setup more frequently to assure accurate test results. For example, any problem or change with antenna, attenuator or receiver will be reflected in the Comb Generator data with the same setup. The same method can be utilized when EMC emissions measurements for a product varies with sites. The Comb Generator can be used to determine if the test sites are causing the variation.


Other uses of the Comb Generator include evaluating shielding effectiveness or resonance performance of enclosures for electronic equipment.




Specification

Frequency Range	30MHz - 1GHz			
Frequency Step	5/10MHZ,5MHz,10MHz,25MHz			
Power Requirements	USB mini,+5Vdc			
Output connectors	50 ohm,SMA Female			
Charging time	10~12 Hours			
Re-Charge time	16Hours			
Size	120mm(W)*82mm(D)*85mm(H)			
Net Weight	1.1Kg			

Vertical

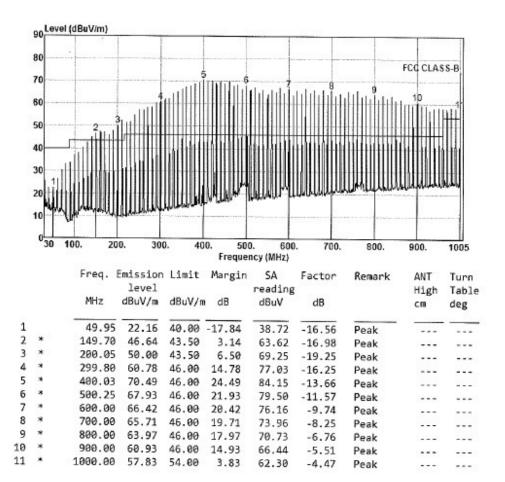

Horizontal

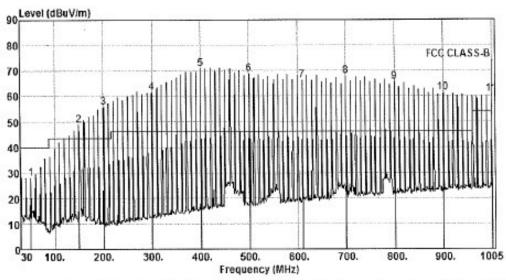

			Emission level		Margin	SA reading	Factor	Remark	ANT High	Turn Table
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB		CIB	deg
1		49.95	27.97	40.00	-12.03	44.53	-16.56	Peak		
2	*	149.78	48.89	43.50	5.39	65.87	-16.98	Peak		
3	*	200.05	55.67	43.50	12.17	74.92	-19.25	Peak		
4	*	299.80	61.46	46.00	15.46	77.71	-16.25	Peak		
5	*	400.03	70.58	46.00	24.58	84.24	-13.66	Peak		
6	*	500.25	68.74	46.00	22.74	80.31	-11.57	Peak		
7	*	610.00	66.15	46.00	20.15	75.75	-9.60	Peak		
8	*	700.00	67.66	46.00	21.66	75.91	-8.25	Peak		
9	*	800.00	65.57	46.00	19.57	72.33	-6.76	Peak	7.7.70	
10	*	900.00	61.05	46.00	15.05	66.56	-5.51	Peak		
11	*	1000.00	60.32	54.00	6.32	64.79	-4.47	Peak		



333桃園縣龜山鄉文三三街38巷8號1F 1F,No.38,Lane8,Wensan 3st street.,Kwei-Shan Hsiang, Taoyuan Hsien 333,Taiwan TEL:+886-3-3286-998 FAX:+886-3-3288-376

E-mail:sales@emci.com.tw

website: www.emci.com.tw