

CG 50/500

Conducted Comb Generator

• Frequency Range: 50kHz-30MHz

• Frequency step:50kHz/500kHz switchable



承儀電子股份有限公司 EMC Instruments corporation





• Frequency Range: 50kHz-30MHz

Frequency step: 50kHz/500kHz switchable









Description

The CG50/500 Conducted Comb Generators are reference signal sources for testing Line Impedance Stabilization Networks (LISN).

CG50/500 output has the harmonics of the fundamental frequency specified by the step size. Has two switchable frequency step sizes the 50 kHz and 500kHz frequency steps.

This allows checks and investigations on conducted measurement systems to be made, for example using a LISN or RJ11,RJ45 standard connectors for conducted measurements using an ISN.

CG50/500 have high impedance to external line voltage AC or DC up to 230 V. This feature allows the Comb Generator to be used while the LISNs are connected to external power source.

CG50/500 is powered by a rechargeable internal battery and external power cable connection.

When fully charged, the battery allows continuous operation of up to 16 hours. The Conducted Comb Generator is included with a battery charger, USB cable accessories are shipped in a wooden storage box.

Application

The main application of Conducted Comb Generator is to quickly verify conducted emissions test setups. And the most important application is trouble conducted measurements using an ISN.

The Conducted Comb Generator the test engineer will be able to perform quick a verification of the conducted test setup more frequently to assure accurate test results.

Other possible applications of the CG50/500 Conducted Comb Generator could include, production evaluation of components, such as cable shields and filters.




Conducted Comb Generator 50/500


ISN of RJ45 (RBW = 10kHz VBW=30kHz)

Frequency Range	50kHz - 30MHz
Frequency Step	50kHz/500kHz switchable
Charging time	16 Hours
Re-Charge time	5 Hours
Size	120mm(W)*82mm(D)*85mm(H)
Net Weight	1.1Kg


LISN (RBW = 10kHz VBW=30kHz)

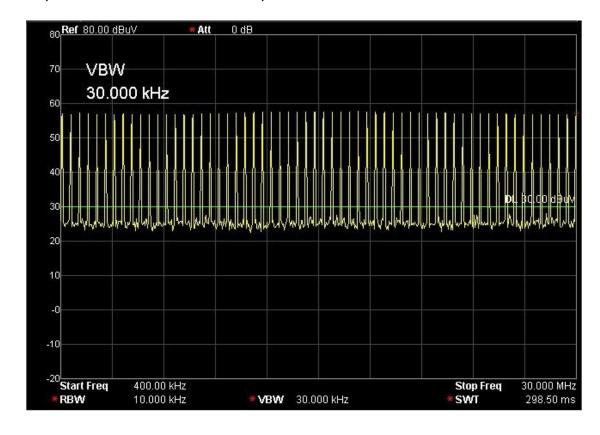



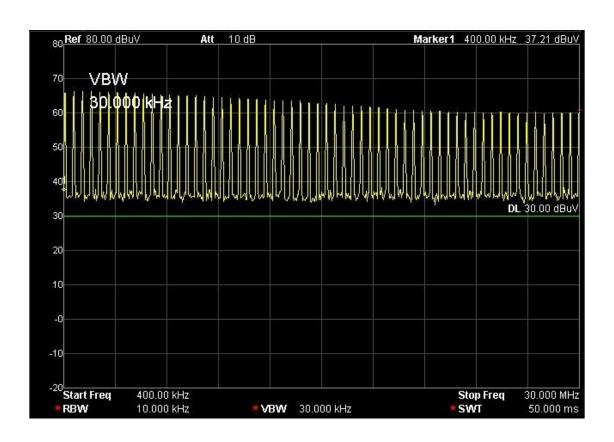

ISN of RJ11 (RBW = 10kHz VBW=30kHz)

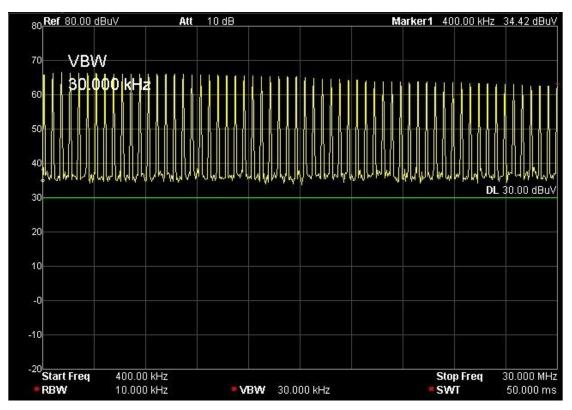



333桃園縣龜山鄉文三三街38巷8號1F 1F,No.38,Lane8,Wensan 3st street.,Kwei-Shan Hsiang, Taoyuan Hsien 333,Taiwan TEL:+886-3-3286-998 FAX:+886-3-3288-376

> Mobile: 0937-214-592 F-mail:sales@emci.com.tw

website: www.emci.com.tw