

TMS3000

GPS or IRIGB network time server with 10 MHz output

The TMS3000 is rack unit equipment able to provide a high stability time source to any Ethernet TCP/IP network. This timeserver uses the NTP (Network Time Protocol) and TP (Time Protocol) to synchronize all the computers connected to the network.

NTP Server

The TMS3000 server is NTP-Primary server type with the following functions :

- Level 1 server, compliant with NTP protocol release 3.0 or 4.0
- Mode : server (question/answer) or broadcast

The client's computers could be synchronised with a precision of 1 to 10 ms, depending on network load.

Equipment and server status information's are available through the SNMP (MIB) protocol.

A NTP client must be installed on every client computer for his synchronization with the server.

It holds three interface connectors:

- o Standard RJ45 for network link IEEE802.3 10/100 Mbs
- o BNC for 1PPS output in phase with UTC
- o SubD 9 pins dedicated to RS232 link for equipment configuration.

A choice of two independent time sources is available for time input:

- IRIGB input
- A GPS module able to provide both UT and high stability 1 PPS signal.

Priority is given to the GNSS source when available because of its greater precision.

GNSS

The GNSS receiver is able to acquire simultaneously 24 satellites and to deliver a very high precision 1 PPS.

Irig-B

The IRIGB input uses the standard 1 KHz amplitude modulated signal compliant with IRIGB STANDARDS 200-98.

Remote control


Remote monitoring of the equipment is made by the network connection by using an embedded web server. or SNMP.

Oscillator

An internal OCXO type oscillator allows a time stability of 1×10^{-10} /day in case of external time source loss. (IRIGB in or GPS failure)

Configuration

The entire configuration of the equipment is contained in a removable Micro SD memory SDCARD.



TMS3000 front face of the equipment

Features

NTP/SNTP

(Network Time Protocol):
NTP (RFC 1305) SNTP (RFC 1361) port
UDP 123.
Server configuration : V3, V4 or V3/V4
automatic.

TP (Time Protocol)

DAY TIME

Time (RFC 868) using port UDP37

SNMP

(Simple Network Management
Protocol):
(RFC 1155, 1157, 1213) V2c

SNMP provides to the network
administrator the status of the
equipment. For safety reasons, no
configuration changes can be made
in this way

HTTP :

Web pages for remote control.

Connectors :

TNC for GNSS input antenna
BNC isolated: IRIGB input
BNC for 10 MHz sine output
BNC for 1PPS output.
SUB'D 9 pins female for the console
serial link .
RJ45 for network connection.

Network interface:

Ethernet IEEE 802.3. 10/100 Base TX.

1 PPS accuracy :

± 100 ns relative to UTC when the
equipment is disciplined with GPS.
 ± 500 ns relative to the beginning of
the IRIGB frame when disciplined with
IRIGB.

IRIGB code:

IRIG-B, signal amplitude modulated
1/3, 1/1 – isolated by transformer.
Code input are compliant with the
"year" information.

Internal reference:

OCXO 10 MHz
Short term stability
1s, 10s: $< 2.10^{-11}$
Long term stability (free running)
 $< 1.10^{-9}$ / day
 $< 3.10^{-8}$ / month
 $< 2.10^{-7}$ / year
Long term stability (GNSS disciplined)
 $< 1.10^{-10}$

Accessories :

To be specifies at time of order
regarding the receiver type:

- Antenna GNSS (GPS,
GPS+GLONASS,.....)
- lightning arrester

Dimensions :

Rack 1U, 19", depth: 350 mm
Weight : 3 kg
Consumption : 20 W

MTBF :


TMS3000 : 100 000 h

Power supply :

Power supply 230V AC :
Female CEE 2P+T with filter & swith
On/Off
Voltage : 85-264VAC / 47-440Hz
Consumption : < 20 W at 230VAC/50
Hz

Certification :

CE, ROHS & ITAR

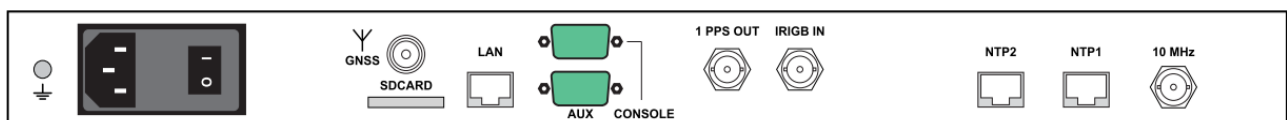

Ordering:

TMS3000: unit with GPS/GLONASS receiver