

SV 1000

SV Range: 0.8 GHz - 3.2 GHz / 1000 W CW



Prana SV 1000

- Class A solid state
- Broadband (instantaneous single band): 0.8 GHz – 3.2 GHz
- Typical output power : 1000 W CW
- Linear output power (1 dB compression) guaranteed with harmonics <-20 dBc:
 - P1dB > 570 W and H < -20 dBc up to 1.8 GHz and
 - P1dB > 470 W and H < -20 dBc from 1.8 GHz to 3.2 GHz
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Reliable, efficient and robust
- 19" cabinet on wheels
- 3 years standard warranty

Maintenance

- Amplifier designed for minimal maintenance
 - Easy access to all parts
 - Modular design
 - Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

Applications

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

Versions

- SV 1000 DC amplifier with:
 - Display
 - Digital control
 - IEEE 488 GPIB Communication
 - Integrated bidirectional coupler
 - display of instantaneous power


SV Range

- SV 20 => 20 W CW
- SV 40 => 40 W CW
- SV 70 => 70 W CW
- SV 120 => 120 W CW
- SV 220 => 220 W CW
- SV 450 => 450 W CW
- SV 1000 => 1000 W CW

Extra

- External coupler
- RF Power cable
- Switching unit

SV1000 POWER AMPLIFIER 1000W / 800 MHz - 3200 MHz

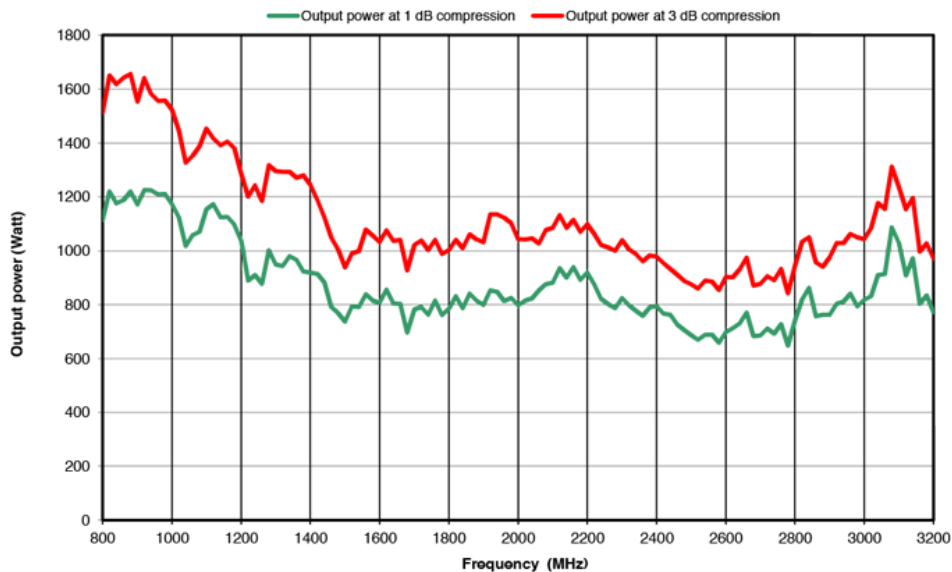

Specifications

| | |
|--|---|
| Frequency bandwidth | 0.8 GHz - 3.2 GHz |
| Typical output power | 1000 W |
| Power at 3 dB compression | 770 W min. up to 1.8 GHz / 670W min. from 1.8 GHz to 3.2 GHz * |
| Power at 1 dB compression | 570 W min. up to 1.8 GHz / 470W min. from 1.8 GHz to 3.2 GHz * |
| Harmonics distortion | H2,H3 < -20 dBc for the output power at 1 dB compression limit |
| Class type | Class A |
| Gain | 63 dB |
| Linear power gain flatness | ± 5 dB max |
| Mismatch tolerance | infinite without damage |
| Input impedance | 50 ohms / VSWR: 2:1max |
| Output impedance | 50 ohms / VSWR: 2:1max |
| Input power | +10 dBm max. |
| RF input connector | Type N fem. (front or rear panel) – other connector type on request |
| RF output connector | Type 7/16 fem. (front or rear panel) – other connector type on request |
| Integrated bidirectional power coupler | Coupling factor 69 dB typ. |
| Power coupling connector | Type N fem. (rear panel) |
| Safety interlock | Connector type BNC |
| Digital control | Transistors, power supplies and internal temperature |
| Communication interface | IEEE 488 |
| 4 lines digital display | Status, faults, (direct and reverse instantaneous power for DC version) |
| Ambient operating temperature | 0 °C / + 35 °C |
| Room temperature storage | -20 °C / +70 °C |
| Cooling | Forced air: 480 l/sec max. (self contained fans) |
| Mains voltage | 47-63 Hz, 3 phases (star or delta) |
| Rated current | 7 kVA |
| Dimensions | 600 x 840 x 1590 mm (30U) / 23.6 x 33.1 x 62.6 in (30U) |
| Weight | 320 kg / 705 lb |