

### Prana LT 320:

- Class A solid state
- Broadband (instantaneous single band): 20 MHz – 1000 MHz
- Typical output power : 320 W CW
- Linear output power (1 dB compression) guaranteed with harmonics <-20 dBc:
  - P1dB > 280 W and H < -20 dBc from 30 MHz to 500 MHz
  - P1dB > 200 W and H < -20 dBc from 500 MHz to 1000 MHz
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Upgradable to LT 600 possible (24U)
- Reliable, efficient and robust
- 19" Rack
- 3 years standard warranty

### Maintenance:

- Amplifier designed for minimal maintenance
  - ⇒ Easy access to all parts
  - ⇒ Modular design
  - ⇒ Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

### Applications:

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

### Versions:

- **LT 320 D** amplifier with:
  - ⇒ Display
  - ⇒ Digital control
  - ⇒ IEEE 488 GPIB Communication
- **LT 320 DC** : LT 320 D with :
  - ⇒ Integrated bidirectional coupler
  - ⇒ display of instantaneous power

### LT series:

- LT 90 => 90 W CW
- LT 160 => 160 W CW
- LT 600 => 600 W CW

### Prana additional options:

- External coupler
- Supply and integration inside a cabinet
- RF Power cable
- Switching unit




### Specifications

Frequency bandwidth	20 MHz - 1000 MHz
Typical output power	320 W
Power at 3 dB compression	320 W min. up to 500 MHz / 250 W min. from 500 MHz to 1000 MHz
Power at 1 dB compression	280 W min. up to 500 MHz / 200 W min. from 500 MHz to 1000 MHz
Harmonics distortion	H2,H3 < -20 for the output power at 1 dB compression limit
Class type	Class A
Gain	54 dB
Linear power gain flatness	± 3 dB max
Mismatch tolerance	infinite without damage
Input impedance	50 ohms / VSWR: 2:1max
Output impedance	50 ohms / VSWR: 2:1max
Input power	+10 dBm max.
RF input connector	Type N fem. (front or rear panel) – other connector type on request
RF output connector	Type N fem. (front or rear panel) – other connector type on request
Safety interlock	Connector type BNC
Digital control	Transistors, power supplies and internal temperature
Communication interface	IEEE 488, RS232
4 lines digital display	Status, faults, (direct and reverse instantaneous power for DC version)
Ambient operating temperature	0 °C / + 35 °C
Room temperature storage	-20 °C / +70 °C
Cooling	Forced air: 120 l/sec max. (self contained fans)
Power voltage	90-250 VAC, 47-63 Hz, single phase
Rated current	10 A at 230 VAC
Dimensions	630 x 450 x 312 mm (7U) / 24.8 x 17.7 x 12.3 in (7U)
Weight	47 kg / 103 lb

### LT 320 DC versions

Integrated bidirectional power coupler	Coupling factor 75 dB (DC version) ± 0.5 dB
Power coupling connector	Type N fem. (rear panel)
Estimated output power losses due to the coupler	0.3 dB

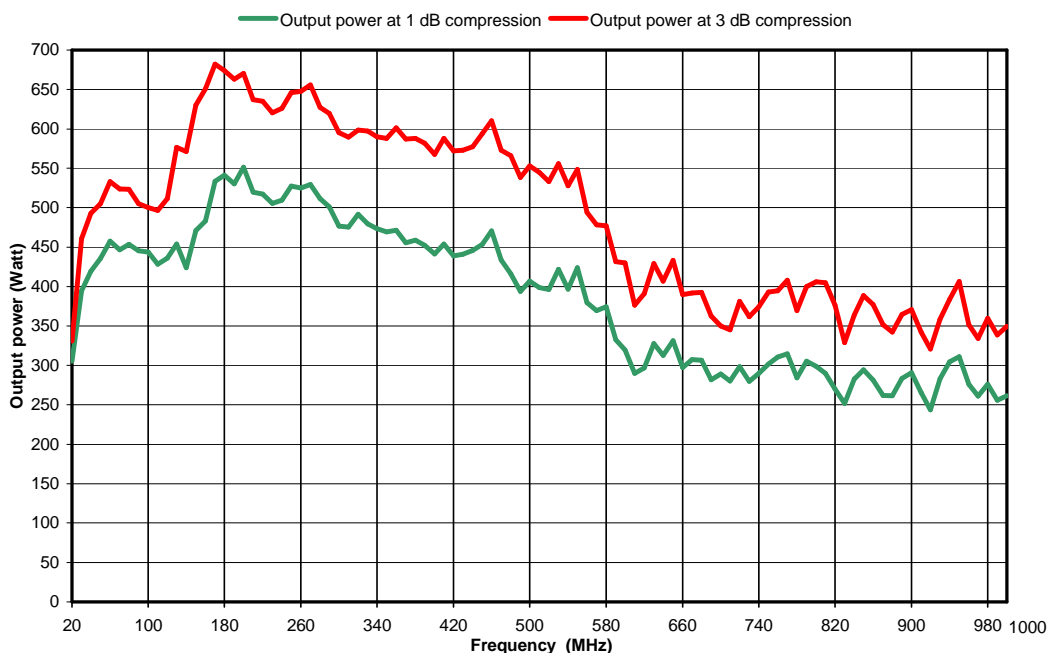

Electrical and Mechanical Specifications subject to change without notice.